
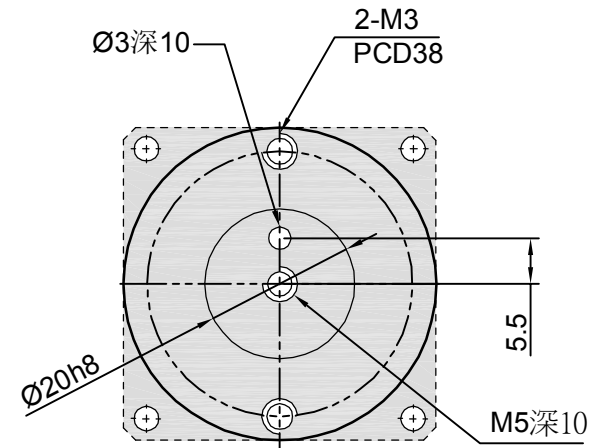
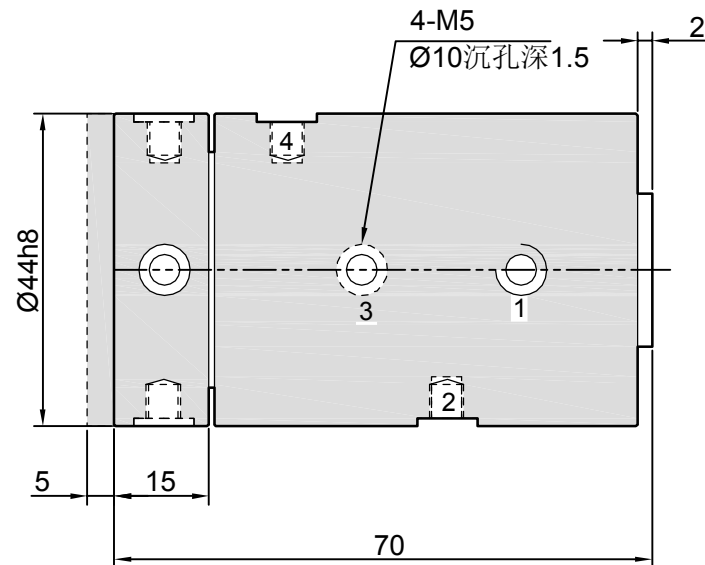


SHEET1

Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0162

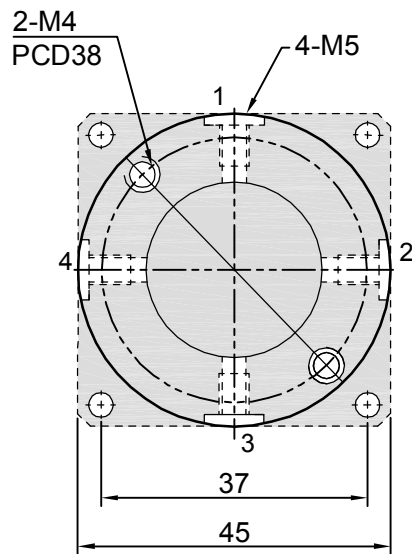

技术参数：
最高转速：200RPM(可定制3000RPM)
最高温度：80℃
最大压力：10Bar
介质：真空 空气

Drawn	JSM	6/2/03
Checked	PJE	1013/05
Checked	PJE	1014/08

TOLERANCE
EXCEPT AS NOTED
x.x ±.125
x.xx ±.015
x.xxx ±.0005
ANGLES ±.05°

SHAFT MEL/PLTING:
CARBON STL
58-62 RC
BLK OXIDE

SHAFT MEL/PLTING:
CARBON STL
BLK OXIDE

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664


CUSTOMER:

STOCK

P/N:QMR F4-M5

REV:
A 4

THIRD ANGLE PROJECTION:



CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES.INS (HIDNEY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY